BAESIN

High Pressure.

Pressure Boosting • High Pressure Control

Testing Equipment • Hydraulics • Pneumatic



» Air driven high pressure pumps

Gas pressure up to 1,600 bar (23,200 psi).

Hydraulic pressure up to 6,400 bar (92,824 psi).

Content

Content:	Page:
BAESIN introduction	3-4
Pump selection	5
Pneumatic Booster Pumps for Gas	
— BPG-1D Series	6
— BPG-2H Series	7
— BPG-2DH Series	8
— BPG-2S Series	9
— BPG-2DS Series	10
Pneumatic Booster Pumps for Liquid	
— BPL-1DM Series	11
— BPL-1D Series	12
— BPL-2H Series	13
— BPL-2DH Series	14

BAESIN Introduction

Why We Were Founded?
Are you experiencing any of these frustrations?

Selection Stage:

- You browse through brochures from multiple factories, but no one can accurately understand your actual operating conditions and parameters. The solutions they offer are always “close enough” rather than truly “right for you.”
- The factory sales team doesn’t understand the technology, and the technical team doesn’t communicate directly with clients – messages get distorted layer by layer.
- Your inquiries go unanswered, and the few factories that do respond give you only a quotation without a detailed proposal and parameters, so you have no way to judge if the solution is really applicable.

Pricing & Trust:

- The same piece of equipment can be quoted 30% or even 50% higher by different factories. You can’t tell whether the difference comes from material quality, configuration cuts, or simply inflated pricing.
- Factories claim to have “export qualifications” or “experience with similar projects,” but they cannot provide actual case studies or customs records.
- When you ask for real factory videos or production progress updates, they always make excuses like “the workshop isn’t accessible right now” – you can’t verify their authenticity.

Quality, Delivery & Shipping:

- After production, there are no test videos. You only get a photo of the finished product just before shipment, so you can’t confirm whether the equipment runs properly and meets standards.
- The agreed delivery date is delayed again and again, with excuses always being “too many orders” or “we’re rushing it,” but you have no way to verify.
- The shipping solutions offered by the factory are overpriced, but finding a freight forwarder on your own is too complicated.
- Upon arrival at the destination port, you open the container and find that the nameplate parameters don’t match the contract, accessories are missing, or damage has occurred during transit – yet the factory blames the logistics provider.

After-Sales & On-Site Support:

- When equipment fails during commissioning, remote guidance from the factory is slow, vague, or sometimes nonexistent – they simply stop replying.
- If you need an engineer for on-site installation or training, the factory refuses citing “visa difficulties” or “high travel costs,” or quotes a price far above market rates.
- During the warranty period, a fault requires you to ship the faulty part back for inspection-the round-trip can take months, and the production downtime loss far exceeds the equipment’s value.
- When you need upgrades or modifications, the original factory has already stopped production or switched product lines, and you can’t find anyone to discuss technical details.

BAESIN Introduction

Why We Were Founded?
Are you experiencing any of these frustrations?

Hidden Risks:

- Only after payment does the factory tell you that "this model needs customization," but the contract doesn't specify the detailed parameters, leaving you with no basis for any future disputes.
- Language and cultural differences lead to misunderstandings on technical specifics – for example, "explosion-proof rating" or "sealing material" – both sides may interpret them differently.
- The factory serves multiple large clients at the same time, and your small-batch order is pushed to the back of the production line – you are always the lowest priority.
- When you need third-party inspection or certification documents, the factory cannot provide complete paperwork, causing demurrage charges at the port.

Our Value – Helping You Avoid All the Hidden Pitfalls:

We are not middlemen or resellers – we are your technical procurement partner overseas.
We have deep expertise in pneumatic pressure boosting equipment, know the factory landscape inside out, and are skilled in export processes. With our professional capabilities, we offer you:

1. **Precise Matching:** Based on your specific operating conditions, we precisely provide suitable solutions for your comparison and selection.
2. **Contract Assurance:** We lock in all contract details – configuration, materials, delivery date – in black and white and fully traceable. We sign a legally binding domestic contract with the factory, eliminating the risk of default.
3. **End-to-End Quality Control:** After production is completed, we take photos of the equipment appearance, record operational test videos, and itemize the equipment and accessory quantities. We then provide a complete checklist and test run report.
4. **Optimized Logistics:** We compare multiple partner freight forwarders, and on the premise of ensuring transit time and service quality, we offer you the most cost-effective shipping solution.
5. **Rapid After-Sales:** We provide prompt online after-sales support. For replacement parts within the warranty period, we ship them free of charge within 1–3 days. If on-site support overseas is required, we can arrange business travel as soon as possible (travel and labor costs are reimbursed at actual expense).
6. **Transparent Costing:** For replacement parts outside the warranty period, we charge only the parts cost and shipping – no markup for profit.
7. **Long-Term Backing:** We maintain complete records of all orders. For future maintenance, even if the original factory no longer supports the equipment, we can still source suitable replacement parts in the Chinese market – we are always your technical backbone.

Pump Selection

Overview & Model Codes:

Baesin is a professional pneumatic technical proposal consulting and trading service company – we do not manufacture. For our standard pneumatic booster pumps, however, we have conducted rigorous factory audits and on-site inspections to select one high-quality manufacturer as our designated supply base. This ensures that every pump we deliver is consistent in performance and reliable in quality. On this foundation, Baesin's pneumatic booster pumps provide suitable solutions for various applications, with different flow rates and different maximum allowable working pressures. Baesin's pneumatic booster pumps can be divided into two main categories: booster pumps for gas and booster pumps for liquid. The pump's boost ratio, number of drive cylinders, number of boost cylinders, and number of boosting stages can be identified from the name of each model.

For example: BPG-1D-25, which means a single-acting, single-stage booster pump with one air drive piston and a boost ratio of 1:25, achieving a maximum working pressure of 200 bar (2900 PSI) at an air drive pressure (P_{drive}) of 8 bar (116 PSI).

Configuration Notes

- Single-Acting vs. Double-Acting:  vs. 

This refers to whether the pump has one high-pressure cylinder or two. In a single-acting pump, fluid (gas/liquid) is displaced only during one stroke of the piston; the return stroke relies on a spring or reset mechanism and does not discharge fluid. In a double-acting pump, high-pressure cylinders are arranged on both sides of the piston, with suction and discharge alternating on the forward and return strokes – fluid is delivered during every stroke.

This structural difference directly affects pressure output stability. Single-acting pumps produce significant flow pulsation and relatively poor continuity. Double-acting pumps deliver smoother and more uniform flow with substantially lower pulsation levels, making them the preferred choice for applications that demand high stability.

- Single-Stage vs. Two-Stage Boosting:  Same Boost ratio vs. Different Boost ratios 

This indicates how many times the fluid is compressed before reaching the final high-pressure outlet. Single-stage boosting means the fluid undergoes only one compression step, going directly from inlet pressure to the target high pressure. Two-stage boosting means the fluid is compressed in two series stages inside the pump – like a relay race in pressure build-up. It typically features two high-pressure heads of different sizes (a larger primary stage and a smaller secondary stage).

- With one air drive piston vs. With two air drive pistons:  vs. 

At low-pressure, high-frequency operation, a single-piston design achieves similar strokes per minute as its dual-piston counterpart. In fact, due to lower air consumption and faster cylinder filling, it may even deliver slightly higher initial flow rates during the low-pressure stage.

However, as pressure builds, the single piston faces greater resistance and the stroke frequency drops off more quickly.


Two drive pistons work together like two people pushing a heavy load – effectively doubling the driving force. This allows the pump to maintain a high stroke frequency even under elevated pressure. As a result, it delivers faster displacement and higher output flow in the high-pressure stage, significantly reducing the overall pressurization time.

Pneumatic Booster Pumps for Gas

BAESIN BPG-1D Series

- **Single-acting**
- **Single-stage**
- **With one air drive piston**
- **For operating pressures up to 800 bar (11,603 psi)**
- **Drive air 3-8 bar(43.5-116 psi)**
- **O_2, N_2, Ar, CO_2, H_2, He, Air, CH_4, C_2H_2, C_3H_8, C_4H_{10}, CO...**



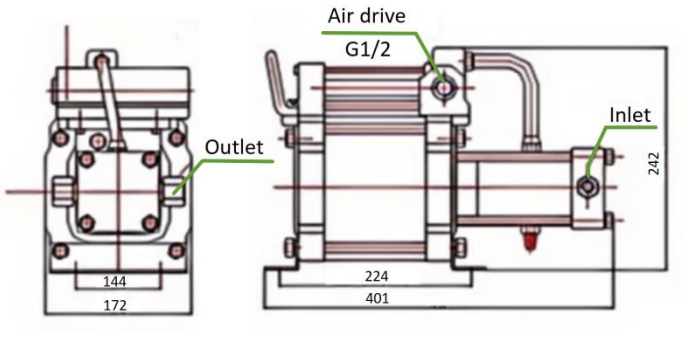

P_{in} = Gas inlet pressure P_{out} = Working pressure

P_{drive} = Air drive pressure i = Pressure ratio

$P_{out} = P_{drive} \times i$


Type	Pressure ratio	Max working pressure [bar]	[psi]	Min. gas inlet pressure [bar]	[psi]	Max. gas inlet Pressure [bar]	[psi]	Connections: Drive air	Gas inlet	Gas outlet	Max. Flow [L/min]
BPG-1D-02	1:2	16	232	0.1	1.45	16	232	G 1/2	NPT 1/2	NPT 1/2	960 [at P_{in} of 6 bar]
BPG-1D-05	1:5	40	580	2	29	40	580	G 1/2	NPT 1/2	NPT 1/2	360 [at P_{in} of 6 bar]
BPG-1D-06	1:6	48	696	3.5	50	48	696	G 1/2	NPT 1/2	NPT 1/2	110 [at P_{in} of 6 bar]
BPG-1D-10	1:10	80	1160	5.5	79	80	1160	G 1/2	NPT 3/8	NPT 3/8	196 [at P_{in} of 20 bar]
BPG-1D-15	1:15	120	1740	5.5	79	120	1740	G 1/2	NPT 1/4	NPT 1/4	135 [at P_{in} of 20 bar]
BPG-1D-25	1:25	200	2900	10	145	200	2900	G 1/2	NPT 1/4	NPT 1/4	81 [at P_{in} of 20 bar]
BPG-1D-40	1:40	320	4641	15	217	320	4641	G 1/2	NPT 1/4	NPT 1/4	49 [at P_{in} of 20 bar]
BPG-1D-60	1:60	480	6961	25	362	480	6961	G 1/2	NPT 1/4	NPT 1/4	61 [at P_{in} of 40 bar]
BPG-1D-100	1:100	800	11603	35	507	800	11603	G 1/2	NPT 1/4	M14 *1.5	39 [at P_{in} of 40 bar]

Pneumatic Booster Pumps for Gas

BAESIN BPG-2H Series

- **Double-acting**
- **Single-stage**
- **With one air drive piston**
- **For operating pressures up to 800 bar (11,600 psi)**
- **Drive air 3-8 bar(43.5-116 psi)**
- **O_2, N_2, Ar, CO_2, H_2, He, Air, CH_4, C_2H_2, C_3H_8, C_4H_{10}, CO...**



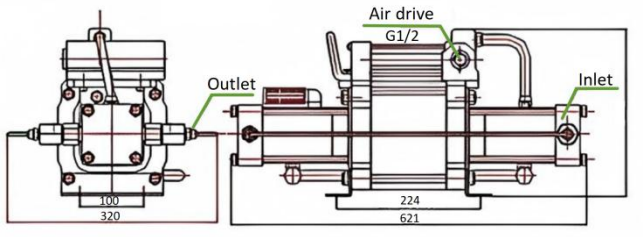

P_{in} = Gas inlet pressure P_{out} = Working pressure

P_{drive} = Air drive pressure i = Pressure ratio

$P_{out} = P_{drive} \times i$


Type	Pressure ratio	Max working pressure [bar]	[psi]	Min. gas inlet pressure [bar]	[psi]	Max. gas inlet Pressure [bar]	[psi]	Connections: Drive air	Gas inlet	Gas outlet	Max. Flow [L/min]
BPG-2H-07	1:7	56	812	3	43	56	812	G 1/2	NPT 3/8	NPT 3/8	450 [at P_{in} of 6 bar]
BPG-2H-10	1:10	80	1160	5	72	80	1160	G 1/2	NPT 3/8	NPT 3/8	372 [at P_{in} of 6 bar]
BPG-2H-15	1:15	120	1740	5	72	120	1740	G 1/2	NPT 3/8	NPT 3/8	305 [at P_{in} of 6 bar]
BPG-2H-25	1:25	200	2900	10	145	200	2900	G 1/2	NPT 1/4	NPT 1/4	154 [at P_{in} of 20 bar]
BPG-2H-40	1:40	320	4641	15	217	320	4641	G 1/2	NPT 1/4	NPT 1/4	92 [at P_{in} of 20 bar]
BPG-2H-60	1:60	480	6961	25	362	480	6961	G 1/2	NPT 1/4	NPT 1/4	115 [at P_{in} of 40 bar]
BPG-2H-100	1:100	800	11603	35	507	800	11603	G 1/2	NPT 1/4	NPT 1/4	74 [at P_{in} of 40 bar]

Pneumatic Booster Pumps for Gas

BAESIN BPG-2DH Series

- **Double-acting**
- **Single-stage**
- **With two air drive pistons**
- **For operating pressures up to 1,600 bar (23,206 psi)**
- **Drive air 3-8 bar(43.5-116 psi)**
- **O_2, N_2, Ar, CO_2, H_2, He, Air, CH_4, C_2H_2, C_3H_8, C_4H_{10}, CO...**



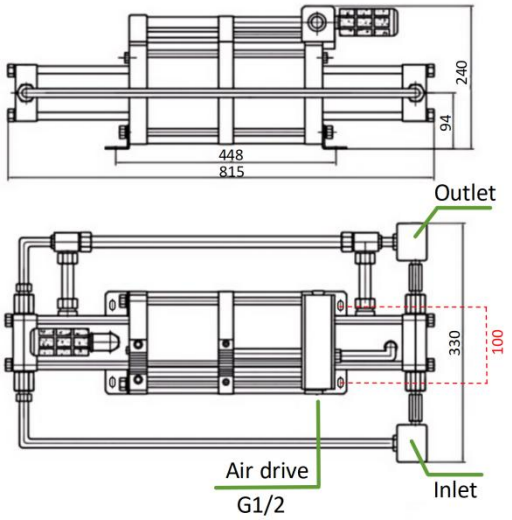

P_{in} = Gas inlet pressure P_{out} = Working pressure

P_{drive} = Air drive pressure i = Pressure ratio

$P_{out} = P_{drive} \times i$


Type	Pressure ratio	Max working pressure [bar]	[psi]	Min. gas inlet pressure [bar]	[psi]	Max. gas inlet Pressure [bar]	[psi]	Connections: Drive air	Gas inlet	Gas outlet	Max. Flow [L/min]
BPG-2DH-07	1:7	56	812	4.4	63	56	812	G 1/2	NPT 3/8	NPT 3/8	910 [at P_{in} of 6 bar]
BPG-2DH-10	1:10	80	1160	5	72	80	1160	G 1/2	NPT 3/8	NPT 3/8	800 [at P_{in} of 6 bar]
BPG-2DH-15	1:15	120	1740	6	87	120	1740	G 1/2	NPT 3/8	NPT 3/8	530 [at P_{in} of 6 bar]
BPG-2DH-25	1:25	200	2900	10	145	200	2900	G 1/2	NPT 3/8	NPT 3/8	280 [at P_{in} of 20 bar]
BPG-2DH-40	1:40	320	4641	25	362	320	4641	G 1/2	NPT 3/8	NPT 1/4	210 [at P_{in} of 20 bar]
BPG-2DH-60	1:60	480	6961	30	435	480	6961	G 1/2	NPT 3/8	NPT 1/4	155 [at P_{in} of 20 bar]
BPG-2DH-100	1:100	800	11603	35	507	800	11603	G 1/2	NPT 1/4	NPT 1/4	130 [at P_{in} of 20 bar]
BPG-2DH-120	1:120	960	13923	50	725	960	13923	G 1/2	NPT 1/4	NPT 1/4	110 [at P_{in} of 60 bar]
BPG-2DH-130	1:130	1040	15083	50	725	1040	15083	G 1/2	NPT 1/4	NPT 1/4	99 [at P_{in} of 40 bar]
BPG-2DH-200	1:200	1600	23206	80	1160	1600	23206	G 1/2	NPT 1/4	NPT 1/4	55 [at P_{in} of 40 bar]

Pneumatic Booster Pumps for Gas

BAESIN BPG-2S Series

- **Double-acting**
- **Two-stage**
- **With one air drive piston**
- **For operating pressures up to 800 bar (11,603 psi)**
- **Drive air 3-8 bar(43.5-116 psi)**
- **O_2, N_2, Ar, CO_2, H_2, He, Air, CH_4, C_2H_2, C_3H_8, C_4H_{10}, CO...**



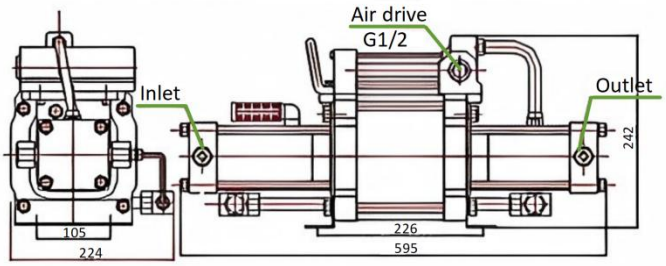

P_{in} = Gas inlet pressure P_{out} = Working pressure

P_{drive} = Air drive pressure i = Pressure ratio

$P_{out} = P_{drive} \times i$


Type	Pressure ratio	Max working pressure [bar]	[psi]	Min. gas inlet pressure [bar]	[psi]	Max. gas inlet Pressure [bar]	[psi]	Connections: Drive air	Gas inlet	Gas outlet	Max. Flow [L/min]
BPG-2S-15	1:15	120	1740	0.1	1.45	56	812	G 1/2	NPT 3/8	NPT 3/8	240 [at P_{in} of 8 bar]
BPG-2S-25	1:25	200	2900	0.1	1.45	10	145	G 1/2	NPT 3/8	NPT 1/4	136 [at P_{in} of 8 bar]
BPG-2S-40	1:40	320	4641	0.1	1.45	10	145	G 1/2	NPT 3/8	NPT 1/4	124 [at P_{in} of 8 bar]
BPG-2S-60	1:60	480	6961	0.1	1.45	10	145	G 1/2	NPT 3/8	NPT 1/4	84 [at P_{in} of 8 bar]
BPG-2S-25/60	1:60	480	6961	10	145	25	362	G 1/2	NPT 3/8	NPT 1/4	80 [at P_{in} of 15 bar]
BPG-2S-100	1:100	800	11603	0.1	1.45	10	145	G 1/2	NPT 3/8	M14 *1.5	63 [at P_{in} of 8 bar]

Pneumatic Booster Pumps for Gas

BAESIN BPG-2DS Series

- **Double-acting**
- **Two-stage**
- **With two air drive pistons**
- **For operating pressures up to 800 bar (11,603 psi)**
- **Drive air 3-8 bar(43.5-116 psi)**
- **O_2, N_2, Ar, CO_2, H_2, He, Air, CH_4, C_2H_2, C_3H_8, C_4H_{10}, CO...**



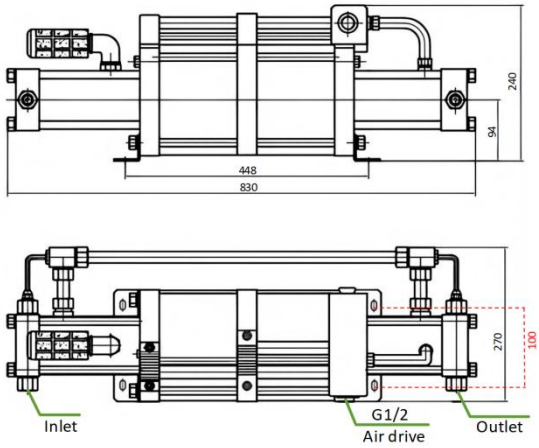

P_{in} = Gas inlet pressure P_{out} = Working pressure

P_{drive} = Air drive pressure i = Pressure ratio


$P_{out} = P_{drive} \times i$


Type	Pressure ratio	Max working pressure [bar]	[psi]	Min. gas inlet pressure [bar]	[psi]	Max. gas inlet Pressure [bar]	[psi]	Connections: Drive air	Gas inlet	Gas outlet	Max. Flow [L/min]
BPG-2DS-15	1:15	120	1740	4	58	56	812	G 1/2	NPT 3/8	NPT 3/8	540 [at P_{in} of 10 bar]
BPG-2DS-25	1:25	200	2900	4	58	56	812	G 1/2	NPT 3/8	NPT 3/8	305 [at P_{in} of 10 bar]
BPG-2DS-40	1:40	320	4641	6	87	120	1740	G 1/2	NPT 3/8	NPT 1/4	235 [at P_{in} of 10 bar]
BPG-2DS-60	1:60	480	6961	6	87	120	1740	G 1/2	NPT 3/8	NPT 1/4	185 [at P_{in} of 10 bar]
BPG-2DS-100	1:100	800	11603	6	87	120	1740	G 1/2	NPT 3/8	NPT 1/4	150 [at P_{in} of 15 bar]

Pneumatic Booster Pumps for Liquid

BAESIN BPL-1DM Series

- **Single-acting**
- **Single-stage**
- **With one air drive piston**
- **For operating pressures up to 1360 bar (19,725 psi)**
- **Drive air 3-8 bar(43.5-116 psi)**
- **Water, oil, chemical reagent**

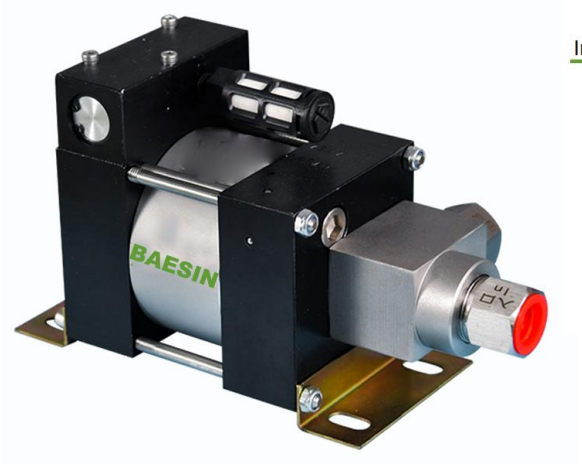

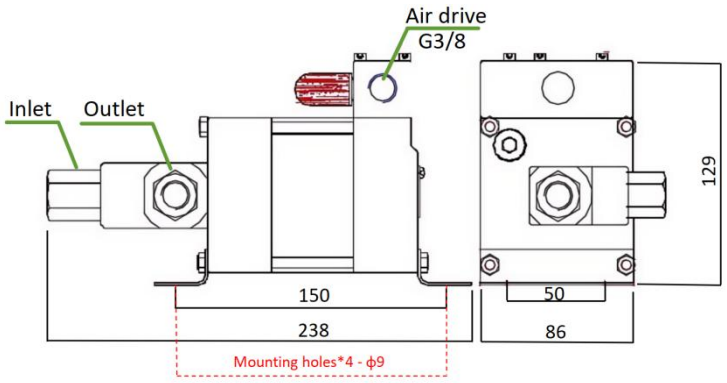

P_{in} = Gas inlet pressure P_{out} = Working pressure

P_{drive} = Air drive pressure i = Pressure ratio

$P_{out} = P_{drive} \times i$


Type	Pressure ratio	Max working pressure [bar]	[psi]	Connections: Drive air	Liquid inlet	Liquid outlet	Max. Flow [L/min]
BPL-1DM-04	1:4	32	464	PT 3/8	NPT 1/2	NPT 1/2	15.05
BPL-1DM-10	1:10	80	1160	PT 3/8	NPT 3/4	NPT 1/2	5.80
BPL-1DM-16	1:16	128	1856	PT 3/8	NPT 1/2	NPT 1/2	3.75
BPL-1DM-30	1:30	240	3480	PT 3/8	NPT 1/2	NPT 3/8	1.86
BPL-1DM-44	1:44	352	5105	PT 3/8	NPT 3/8	NPT 3/8	1.35
BPL-1DM-64	1:64	512	7425	PT 3/8	NPT 3/8	NPT 3/8	0.94
BPL-1DM-100	1:100	800	11603	PT 3/8	NPT 3/8	NPT 3/8	0.61
BPL-1DM-170	1:170	1360	19725	PT 3/8	NPT 3/8	M14*1.5	0.33

Pneumatic Booster Pumps for Liquid

BAESIN BPL-1D Series

- **Single-acting**
- **Single-stage**
- **With one air drive piston**
- **For operating pressures up to 6400 bar (92,824 psi)**
- **Drive air 3-8 bar(43.5-116 psi)**
- **Water, oil, chemical reagent**



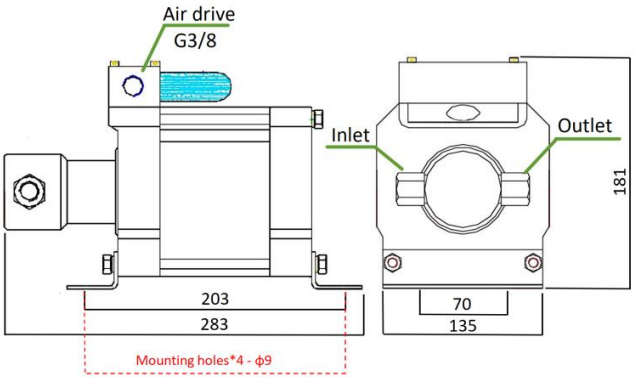

P_{in} = Gas inlet pressure P_{out} = Working pressure

P_{drive} = Air drive pressure i = Pressure ratio

$P_{out} = P_{drive} \times i$


Type	Pressure ratio	Max working pressure [bar]	[psi]	Connections: Drive air	Liquid inlet	Liquid outlet	Max. Flow [L/min]
BPL-1D-04	1:4	32	464	G 1/2	NPT 3/4	NPT 3/4	48.23
BPL-1D-10	1:10	80	1160	G 1/2	NPT 1/2	NPT 1/2	16.78
BPL-1D-16	1:16	128	1856	G 1/2	NPT 1/2	NPT 1/2	12.06
BPL-1D-28	1:28	224	3248	G 1/2	NPT 1/2	NPT 1/2	6.78
BPL-1D-40	1:40	320	4641	G 1/2	NPT 3/8	NPT 3/8	4.70
BPL-1D-64	1:64	512	7425	G 1/2	NPT 3/8	NPT 3/8	3.01
BPL-1D-80	1:80	640	9282	G 1/2	NPT 3/8	NPT 3/8	2.44
BPL-1D-100	1:100	800	11603	G 1/2	NPT 3/8	NPT 3/8	1.92
BPL-1D-130	1:130	1040	15083	G 1/2	NPT 3/8	NPT 3/8	1.48
BPL-1D-175	1:175	1400	20305	G 1/2	NPT 1/4	UNF 9/16	1.08
BPL-1D-240	1:240	1920	27847	G 1/2	NPT 1/4	UNF 9/16	0.56
BPL-1D-300	1:300	2400	34809	G 1/2	NPT 1/4	UNF 9/16	0.46
BPL-1D-400	1:400	3200	46412	G 1/2	NPT 1/4	UNF 9/16	0.36
BPL-1D-512	1:512	4096	59407	G 1/2	NPT 1/4	UNF 9/16	0.47
BPL-1D-640	1:640	5120	74259	G 1/2	NPT 1/4	UNF 9/16	0.38
BPL-1D-800	1:800	6400	92824	G 1/2	NPT 1/4	UNF 9/16	0.25

Pneumatic Booster Pumps for Liquid

BAESIN BPL-2H Series

- **Double-acting**
- **Single-stage**
- **With one air drive piston**
- **For operating pressures up to 3200 bar (46,412 psi)**
- **Drive air 3-8 bar(43.5-116 psi)**
- **Water, oil, chemical reagent**



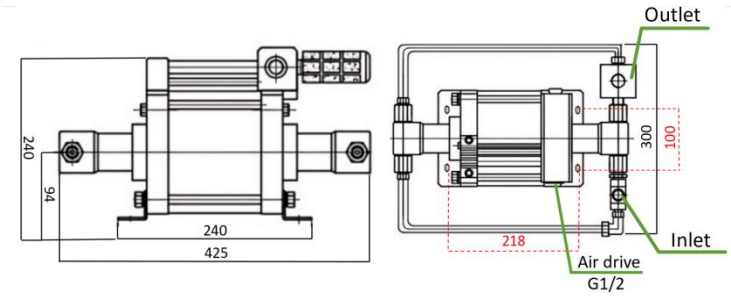

P_{in} = Gas inlet pressure P_{out} = Working pressure

P_{drive} = Air drive pressure i = Pressure ratio

$P_{out} = P_{drive} \times i$


Type	Pressure ratio	Max working pressure [bar]	[psi]	Connections: Drive air	Liquid inlet	Liquid outlet	Max. Flow [L/min]
BPL-2H-04	1:4	32	464	G 1/2	NPT 1/2	NPT 1/2	70.33
BPL-2H-07	1:7	56	812	G 1/2	NPT 1/2	NPT 1/2	32.76
BPL-2H-10	1:10	80	1160	G 1/2	NPT 1/2	NPT 1/2	24.47
BPL-2H-16	1:16	128	1856	G 1/2	NPT 1/2	NPT 1/2	17.59
BPL-2H-20	1:20	160	2320	G 1/2	NPT 1/2	NPT 1/2	13.46
BPL-2H-28	1:28	224	3248	G 1/2	NPT 1/2	NPT 1/2	9.89
BPL-2H-40	1:40	320	4641	G 1/2	NPT 3/8	NPT 3/8	6.86
BPL-2H-64	1:64	512	7425	G 1/2	NPT 3/8	NPT 3/8	4.39
BPL-2H-80	1:80	640	9282	G 1/2	NPT 3/8	NPT 3/8	3.55
BPL-2H-100	1:100	800	11603	G 1/2	NPT 3/8	NPT 3/8	2.80
BPL-2H-130	1:130	1040	15083	G 1/2	NPT 3/8	NPT 3/8	2.15
BPL-2H-170	1:170	1360	19725	G 1/2	NPT 1/4	UNF 9/16	1.58
BPL-2H-240	1:240	1920	27847	G 1/2	NPT 1/4	UNF 9/16	0.82
BPL-2H-300	1:300	2400	34809	G 1/2	NPT 1/4	UNF 9/16	0.67
BPL-2H-400	1:400	3200	46412	G 1/2	NPT 1/4	UNF 9/16	0.53

Pneumatic Booster Pumps for Liquid

BAESIN BPL-2DH Series

- **Double-acting**
- **Single-stage**
- **With two air drive pistons**
- **For operating pressures up to 3200 bar (46,412 psi)**
- **Drive air 3-8 bar(43.5-116 psi)**
- **Water, oil, chemical reagent**



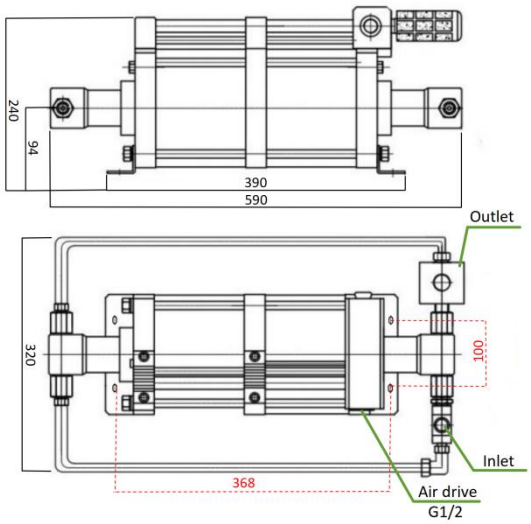

P_{in} = Gas inlet pressure P_{out} = Working pressure

P_{drive} = Air drive pressure i = Pressure ratio

$P_{out} = P_{drive} \times i$

Type	Pressure ratio	Max working pressure [bar]	[psi]	Connections: Drive air	Liquid inlet	Liquid outlet	Max. Flow [L/min]
BPL-2DH-04	1:4	32	464	G 1/2	NPT 3/4	NPT 3/4	140.67
BPL-2DH-07	1:7	56	812	G 1/2	NPT 3/4	NPT 3/4	65.52
BPL-2DH-10	1:10	80	1160	G 1/2	NPT 3/4	NPT 3/4	48.93
BPL-2DH-16	1:16	128	1856	G 1/2	NPT 3/4	NPT 3/4	35.18
BPL-2DH-20	1:20	160	2320	G 1/2	NPT 3/4	NPT 3/4	26.92
BPL-2DH-28	1:28	224	3248	G 1/2	NPT 3/4	NPT 3/4	19.78
BPL-2DH-40	1:40	320	4641	G 1/2	NPT 3/8	NPT 3/8	13.72
BPL-2DH-64	1:64	512	7425	G 1/2	NPT 3/8	NPT 3/8	8.79
BPL-2DH-80	1:80	640	9282	G 1/2	NPT 3/8	NPT 3/8	7.11
BPL-2DH-100	1:100	800	11603	G 1/2	NPT 3/8	NPT 3/8	5.60
BPL-2DH-130	1:130	1040	15083	G 1/2	NPT 3/8	NPT 3/8	4.31
BPL-2DH-170	1:170	1360	19725	G 1/2	NPT 1/4	UNF 9/16	3.15
BPL-2DH-240	1:240	1920	27847	G 1/2	NPT 1/4	UNF 9/16	1.65
BPL-2DH-300	1:300	2400	34809	G 1/2	NPT 1/4	UNF 9/16	1.33
BPL-2DH-400	1:400	3200	46412	G 1/2	NPT 1/4	UNF 9/16	1.05